



CROSSWAY

12 m Low Entry City - Diesel EURO III

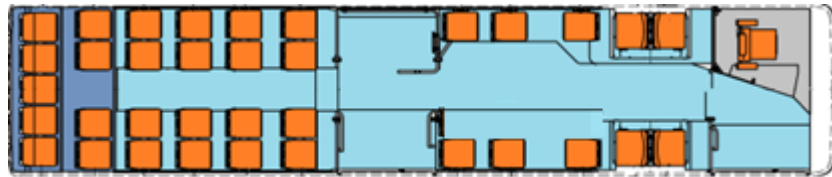

35 passenger seats

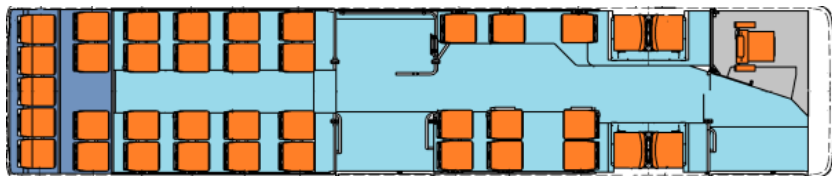

Option : 38 passenger seats

| | |
|--|-------------------|
| Length | 12 050 mm |
| Width | 2 550 mm |
| Height (with/without A/C) | 3 230/3 140 mm |
| Wheelbase | 6 030 mm |
| Front/rear Overhang | 2725/3 295 mm |
| Front / Middle door access height | 320/ 330 mm |
| Front / Middle door width (std) | 1200 mm |
| Wall-to-wall turning radius | 10 720 mm |
| Kerb-to-kerb turning radius | 8 870 mm |
| Approach/ departure angles | 7°/7° |
| GVW (max permitted weight depends on local legislation) Cursor 9 | 19,000 kg |
| Max. weight Rear/Front axle | 12,500 kg/7,200kg |

| | Cursor 9 |
|---|----------------------------|
| Power | 243 kW (330 hp) @ 2200 rpm |
| Torque | 1400 Nm @ 1200 rpm |
| Displacement | 8.7 litres |
| 6 cylinders in line, vertical rear, Common Rail | |

IVECO
BUS

CROSSWAY - 12 m Low Entry City - Diesel EURO III

EXTERNAL EQUIPMENT

Cataphoresis corrosion treatment of the structure and body, finished by a final layer in polyurethane resin. Access to front lights through opening angles

Front door 1200 mm 2-leaf, external opening
Middle door 1200 mm 2-leaf, external opening

Option:

- Additional approach mirror (8952)
- Preparation of coupling device A50-X ECE R 55 (78286)
- Front door 1200 mm, 2-leaf, internal opening. (75759)
- Central door 1200 mm, 2-leaf internal opening (75762)

INTERIOR EQUIPMENT

- Self-adhesive anti-slip PVC carpet on the floor
- Lateral walls covered by laminated panels
- Roof covered by laminated panels
- Separation walls made of laminated panels
- Manual ramp for disabled people

ELECTRICAL EQUIPMENT

- Two batteries 12V – 225 AH
- 3 alternators (3x 150A);
- Electrical box with fuses in left front compartment
- All LED lights
- Fire detection system

Option:

- Elec Ramp (13949)

Option:

- Angle light (integrated into fog light) (8249)
- Open door warning lights (4692)
- Rear-view sensor (8965)
- Rear view camera (1012)
- 12V sockets on the dashboard (13010)

THERMAL COMFORT

- Single glazing with 5 opening windows
- Two roof panels, manual control
- without heating in the passenger compartment, driver's cab only
- No additional/independent heating

Option:

- Two electrically operated roof hatches (13922)
- Double glazing of side windows, driver's window and passenger doors
- Air conditioning power 45 kw (395)
- Front door electrical de-icing (3978)
- 4 passenger heaters (7288)
- Double glazing (3777)

DRIVER'S STATION

- Adjustable driver's seat with air suspension, head restraint, 3-point safety belt
- Manual side and front sun visors
- Conductor separation
- On-board computer with fuel consumption control

Option:

Fully enclosed driver's cab Driving(08950)
refrigerator (8963)
Additional Driver heater (8904)
Front electric conductor sun visor (2842)
Digital tachograph (72484)

GEARBOX

- Automatic gearbox ZF ECOLIFE 6AP I 620B

REAR AXLE

- Arvin/Meritor type 17X single reduction hypoid
- Rear ratio - 8 x 45 (5.63)

FRONT AXLE

- Front axle with independent wheels IVECO type RI75E
- ZF/Bosch type 8098 worm drive with integrated power steering

Suspension

- Lifting/lowering of vehicle suspensions
- Integral air suspension with automatic leveling sensor
- Front: 2 combined air springs/2 shock absorbers/1 leveling sensor
- Rear: 4 air springs/4 shock absorbers/1 stabilizer bar/2 levelling sensors
- Kneeling - without sensitive edge

AIR COMPRESSOR

- Twin-cylinder air compressor 630 cm3 (pressure 9.5 bar)
- Integrated air dryer: purge valves on air tanks

BRAKES

- EBS
- Pneumatic service and emergency brake system with two independent air circuits.
- Brake discs, front and rear, with floating calipers and ABS
- Pneumatic parking brake, acting on the rear wheels

RETARDER

- Compression-release engine brake
- Electromagnetic retarder with brake pedal control
- Integrated hydraulic retarder

TANK

- 200 lt diesel tank

TYRES AND WHEELS

- Tyres type 275/70 R22,5 - CITY - I48/I45

Option:

Automatic Gearbox
Voth NXT 867.8 (25)

Option:

- Reinforced shock absorbers
- Kneeling - with sensitive edge (475)

Option:

- ESP (Electronic Stability Program) (7888)

Option

- 320 lt diesel tank (4349)
- Fuel tank cap with quick release lock (3214)

• Option

- Spare wheel (4576)
- TYRES 275/70R22.5 - CITY - 148/145 – MIXED (20568)

IVECO
BUS